F. G.

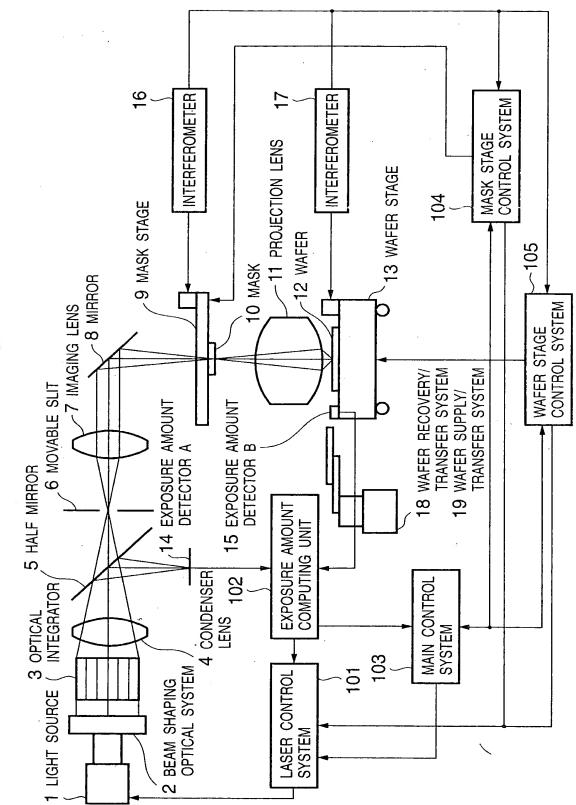


FIG. 2

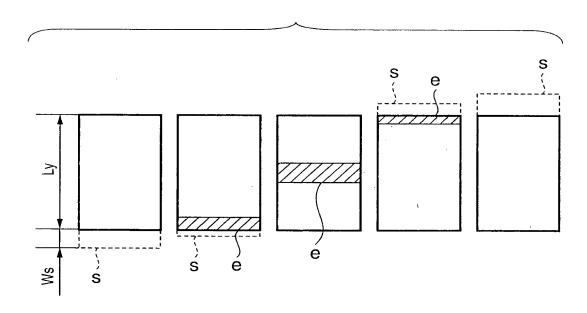


FIG. 3A

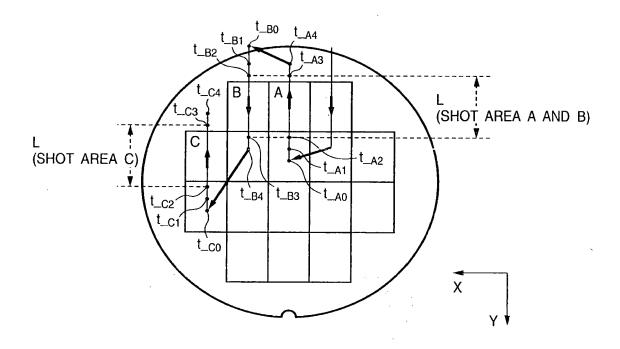
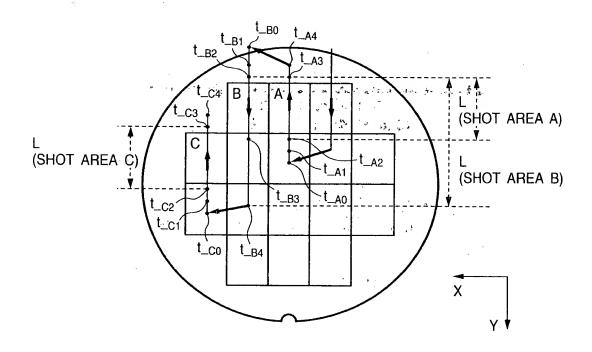

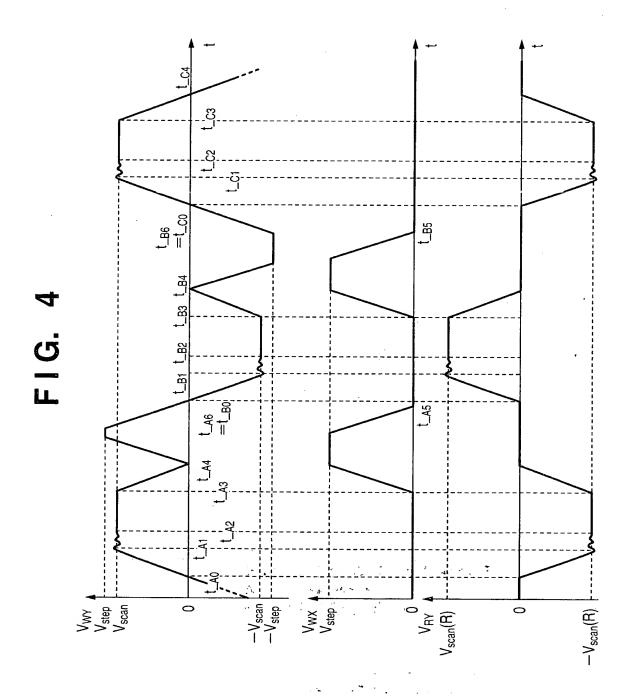
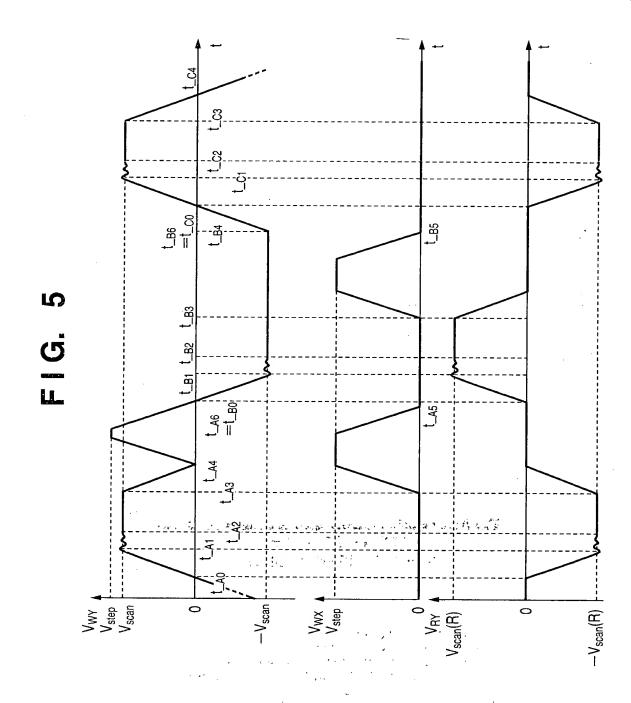



FIG. 3B












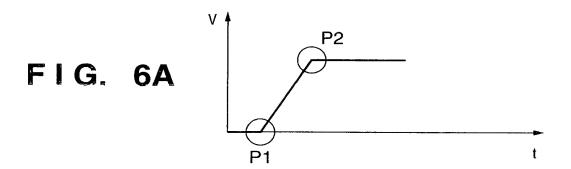

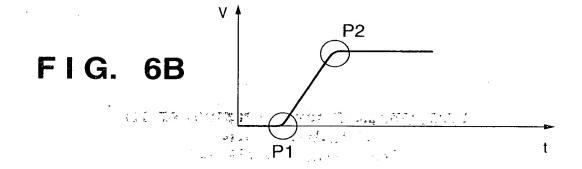

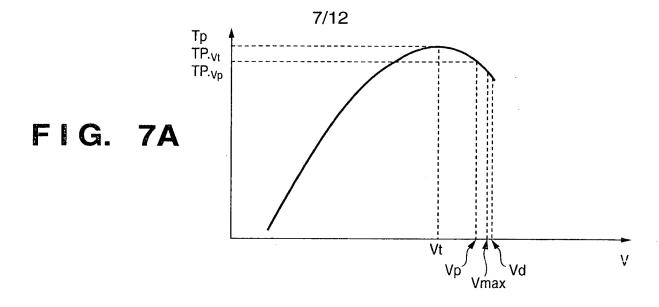

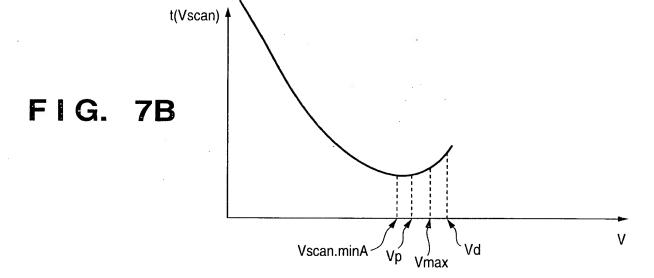

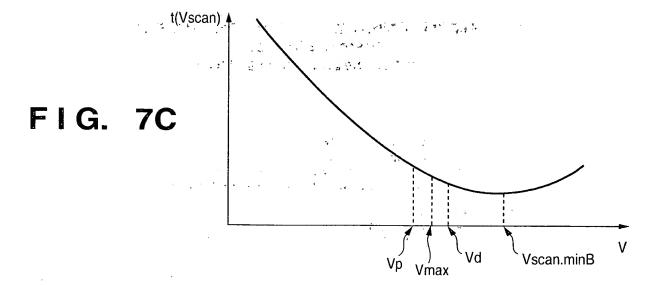


FIG. 8

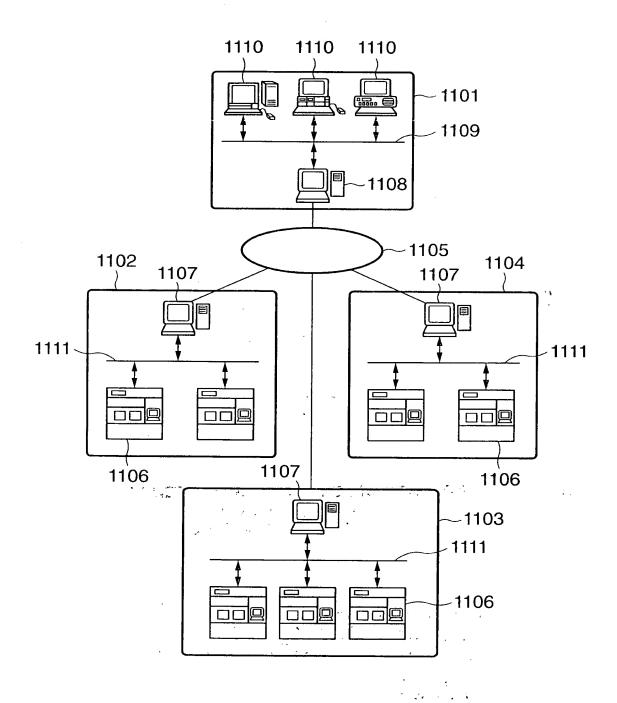


FIG. 9


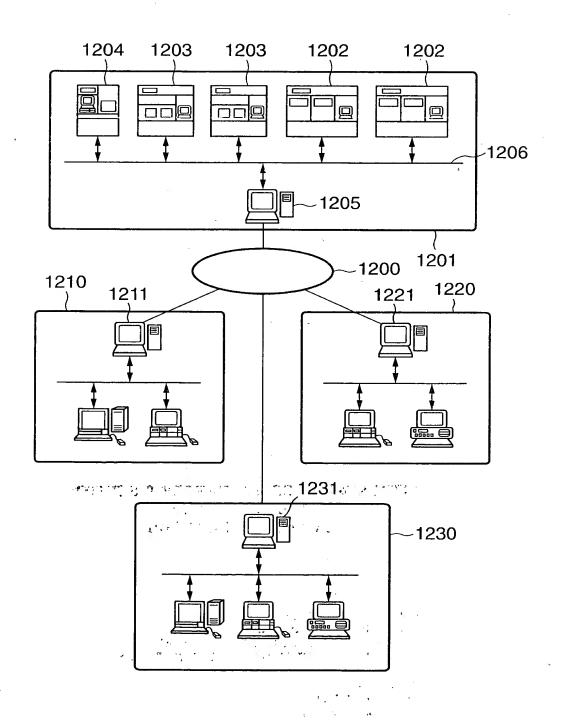


FIG. 10

URL http://www.maintain.co.jp/db/input.html	
TROUBLE DB INPUT WINDOW	
OCCURRENCE DATE 2000/3/15 ~1404	
TYPE OF APPARATUS ******** ~1401	
OBJECT OPERATION ERROR (START-UP ERROR) 1403	
APPARATUS	S S/N 465NS4580001 ~1402
DEGREE OF URGENCY D ~1405	
SYMPTOM	LED KEEPS FLICKERING 企 1406
REMEDY	POWER ON AGAIN (PRESS RED BUTTON IN ACTIVATION) 1407
PROGRESS	INTERIM HAS BEEN DONE ① 1408
SEND) (RE	SET) 1410 1411 1412
LINK TO RESULT LIST DATABASE SOFTWARE LIBRARY OPERATION GUIDE	

FIG. 11

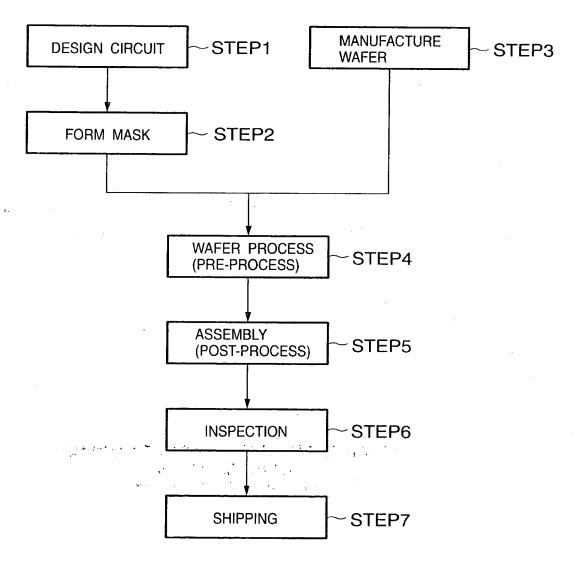

SEMICONDUCTOR DEVICE MANUFACTURING FLOW

FIG. 12

